


RESTRAIN[®] PVC-U SEWER PIPE

PIPELINE DIMENSION

IPLEX RESTRAIN[™] PVC-U SEWER PIPE RANGE AND DIMENSIONS

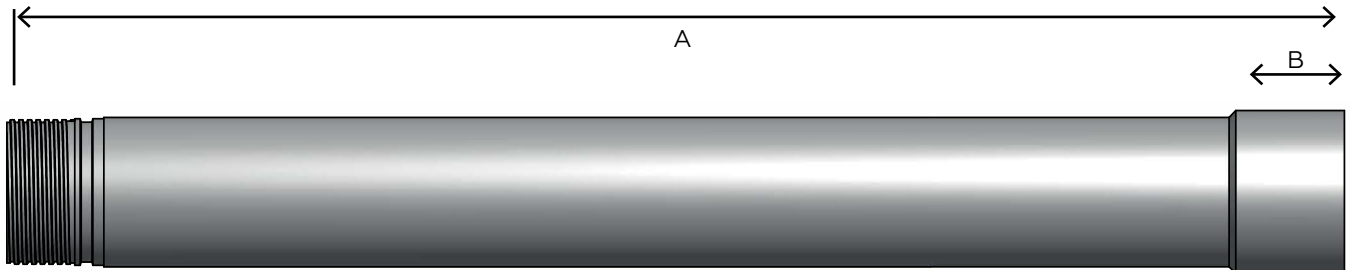

| PRODUCT CODE | PIPE DN | SN | OVERALL LENGTH 'A' (mm) | EFFECTIVE LENGTH CONVERTER 'B' (mm) | MEAN PIPE OD (mm) | SOCKET OD (mm) | MEAN ID (mm) | MEAN WALL (mm) |
|--------------|---------|----|-------------------------|-------------------------------------|-------------------|----------------|--------------|----------------|
| DT16100BY* | 100 | 16 | 2750 | 70 | 110.2 | 115 | 101.6 | 4.3 |
| DT16150BY | 150 | 16 | 2750 | 90 | 160.3 | 170 | 147.5 | 6.4 |
| DT16225BY | 225 | 16 | 2750 | 140 | 250.4 | 260 | 230.6 | 9.9 |
| DT16300BY* | 300 | 16 | 2750 | 140 | 315.5 | 330 | 290.7 | 12.4 |

Note: Non-standard lengths may be available upon request

*Made to order products. Refer to Iplex Pipelines for availability.

The information contained in this document should serve as a guide only and is subject to change without notice. For more information please contact Iplex Pipelines Australia Pty Ltd.

