PP Drainage Systems

SewerMax® Pipe Dimensions

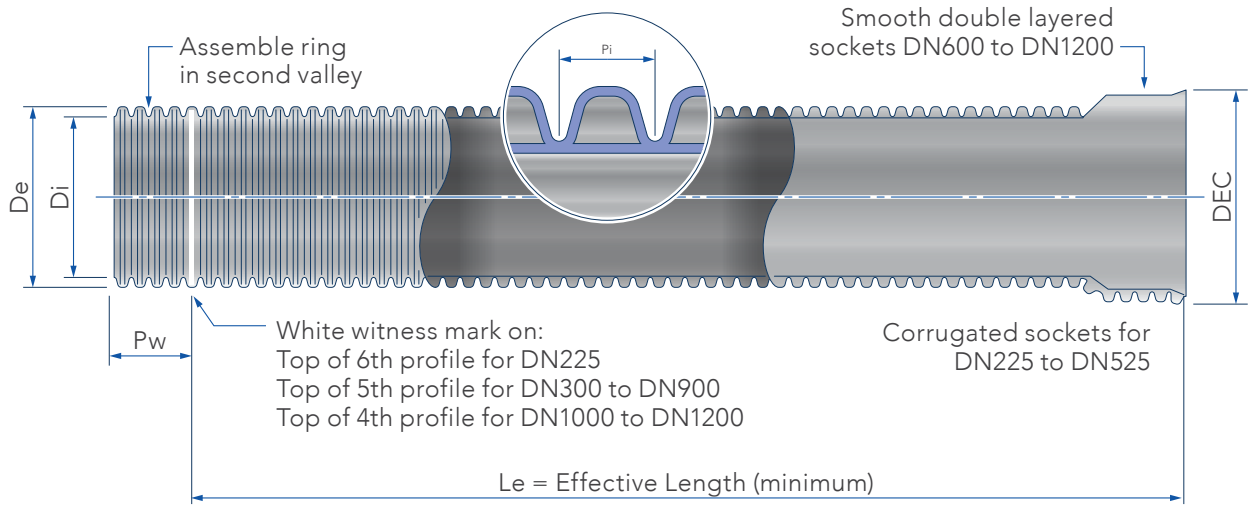

Technical Data

DN	Mean Pipe OD De (mm)	Mean Pipe ID Di (mm)	Socket OD DEC (REF) (mm)	Mean Witness Mark length Pw (mm)	Profile Pitch P_i (REF) (mm)	Approx Pipe Barrel Mass (kg/m)	Effective Lengths Le min (mm)
225	259	225	305	128	25	5	3000
300	344	300	403	155	33	8	3000
375	429	374	502	183	40	12	3000
450	514	448	603	210	57	15	3000
525	600	523	704	260	57	18	3000
600	683	597	750	295	66	26	2765
750	845	732	900	382	80	35	2850
900	1015	871	1075	432	100	56	2650
1000*	TBA	TBA	TBA	TBA	TBA	TBA	TBA
1200	1340	1160	1435	476	133	113	2600

*DN1000 available soon. Contact Iplex for more information.

Note:
1. Standard nominal lengths in all diameters are 3m
2. DN225 to DN525 are supplied with a ribbed socket
3. DN600 to DN1200 are supplied with a double layered socket

© Iplex Pipelines Australia Pty Limited 2026. All drawings and information contained within this document are the exclusive property of Iplex. Iplex reserves the right to change product specifications and other information without prior notification. Measurements provided are for reference purposes only. Information in this publication is given in good faith and no warranty is provided or is to be implied with respect to either the information or the product, in particular the suitability of the product for any particular purpose. The purchaser should independently determine the suitability of the product for the intended application

Iplex_SewerMax_product range dimensions_Mar 26